


Magnetic filter bars of hard ferrite or NdFeB

Magnetic filter bars made $\varnothing 40\text{mm}$ of hard ferrite, bilateral female thread, stainless steel housing

1.4301

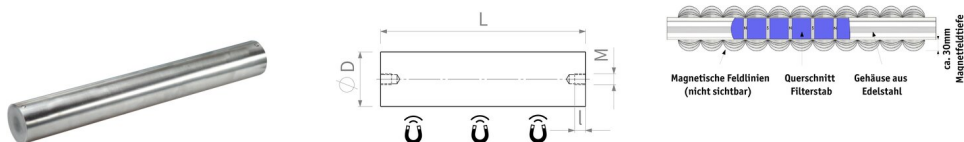

Article number	D mm	L mm	Thread MxL	Temperature °C
MS040HFA-08rh00	40	100	M8x8	200
MS040HFA-08rh01	40	150	M8x8	200
MS040HFA-08rh02	40	200	M8x8	200
MS040HFA-08rh03	40	250	M8x8	200
MS040HFA-08rh04	40	300	M8x8	200
MS040HFA-08rh05	40	350	M8x8	200
MS040HFA-08rh06	40	400	M8x8	200
MS040HFA-08rh07	40	450	M8x8	200
MS040HFA-08rh08	40	500	M8x8	200
MS040HFA-08rh09	40	550	M8x8	200
MS040HFA-08rh10	40	600	M8x8	200

APPLICATION:

Filter systems easily separate iron particles and chips being produced by abrasion or soiling from the material. Due to the even stainless steel enclosure, these particles can be simply removed later on (wiping or compressed air). Filters work reliably and almost wear-free. This extends the useful life of the production line and prevents the risk of expensive maintenance and cleaning work.

PRODUCT INFORMATION:

The above mentioned filter bars are our standard designs. Here the end pieces are not sealed tight and therefore only suitable for dry applications.

Not available ex stock, manufactured on demand.

Alternative to the standard we also offer individual solutions:

» Seal-welded model for use in liquids (e.g. water, coolant)

- » Other fastening options (e.g. external, internal threads and threads measured in inches)
- » High-quality stainless steel enclosure for use in food production
- » Increasing the max. operating temperature up to 350 °C
- » Manufacture of individual, not standardised lengths up to 2000 mm